


# APD3-5 PE G

1200 x 1000 mm

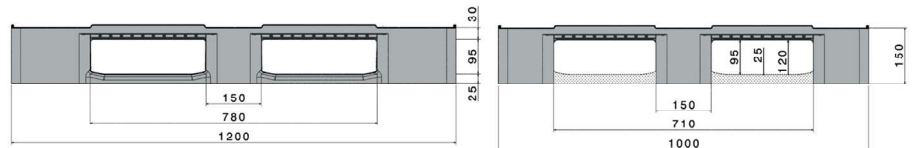

## Technical data <sup>\*1</sup>

Dimensions L x W x H (mm)	1200 x 1000 x 150		
Weight (kg)	15.0		
Material <sup>*3</sup>	HDPE, Regranulated material		
Load capacity (kg) <sup>*2</sup>	Static 5000	Dynamic 1000	In racking system 400

## Characteristics

Colour: black  
Runners: 5, unwelded  
Rims: 7 mm  
Temperatur stability: -30°C to +40°C, briefly up to +90°C  
Manufactured from regnanulated material of one single type

## Options


Transponder  
Reinforcement profiles  
Rims  
Antislip

## Loading quantities (pcs/approx.)

Container	Container 20': 140 Container 40': 330	Container 40' High Cube: 374 Conventional trailer 45' high cube container: 416
Truck	MEGA-Trailer: 494	Jumbo: 570

## Labelling options

Customised printing and numbering available on request depending on quantity. Position upon consultation.



<sup>\*1</sup> All technical data include characteristic features, which have been tested under specially defined conditions. Varying data may result from different conditions of usage such as loading method, prevailing temperature and length of storage time. Our service team is pleased to be at your disposal to check the special requirements of your individual application.

<sup>\*2</sup> Static load: resistance to pressure on a flat ground surface and an evenly distributed load at a room temperature of approx. 20°C.

Dynamic load: on a forklift with an evenly distributed load at a room temperature of approx. 20°C.

In racking system: evenly distributed load (sacks) along the longitudinal sides. Resting on two supports for over 100 h at a room temperature of approx. 20°C.

<sup>\*3</sup> Although still within ISO compulsory range, the load-bearing test results using pallets made from regnanulated material show slightly more variation than those from virgin HDPE.